御 仕 様 書

ES-600

PROTECH®

Specifications

Base Station ES-600

ES-600 仕様

Output		**出力**
HD/SD - SDI	SDI OUT :1	BNC x2: 1Vp-p, 75Ω, Audio, T/C embedded
	SDI RET OUT :1	BNC x2: 1Vp-p, 75Ω,
HD component	HD/SD COMPONENT OUT :1	BNC x3: 1Vp-p, 75Ω, Y/Pb/Pr, auto detecting (HD/SD)
Video	VIDEO OUT :1	BNC x1: 1Vp-p, 75Ω, Anaglog composite or HD-Y ※1
Audio	AUDIO OUT :1	XLR 3-pin(male) x1
Time Code AUX*	TC OUT :1	BNC x1
Input		**入力**
HD/SD - SDI	SDI IN :1	BNC x1: 1Vp-p, 75Ω, Audio, TC embedded
	SDI RET IN :1	BNC x1: 1Vp-p, 75Ω
Video	RET IN :1	BNC x1: Anaglog composite
Video AUX*	VIDEO IN :1	BNC x1
Time Code	TC IN :1	BNC x1
Intercom		**インカム**
2W line	EXT LINE (2W I/O) :2	XLR 3-pin(female) x1, XLR 3-pin(male) x1
4W line	TALLY EXT LINE (4W I/O) :2	D-sub 15-pin mini ×2 (female)
Intercom headset	HEADSET :1	XLR 4-pin(male) x1
Tally		**タリー**
TALLY IN/OUT	TALLY EXT LINE (4W I/O) :2	D-sub 15-pin mini(female) ×2
Tally indicator	Tally indicator : 1	Main panel x1
Remote		**リモート**
Remote	REMOTE :1	8-pin(female) ※2
LANC	LANC :1	Stereo mini-jack φ 2.5mm
Main connection		**接続**
Plug	26-pin(female)	
Maximum distance	100m(0.0625mile)	
General		**一般**
Power requirement	AC 100/200V(85-240V)	
Power consumption	AC operation : approx. 128W Max.	
Storage temperature	-20°C to 60°C (-4 to 140°F)	
Operating temperature	0°C to 40°C (+32 to 104°F)	
Operating humidity	10% to 90% (no condensation)	
Dimensions (WxHxD)	215 x 71 x 320 mm (8.46 × 2.80 × 12.60 inches) (excluding protrusions)	
Weight	approx. 2.5kg (approx. 5.51 lbs.) (without options)	

AUX* : The VIDEO IN or TC OUT of AUX is selectable.

※1 : LVM-89W can receive an analog composite only.

※2 : 8-pin for SONY remote control unit RM-B750 or RM-B150

Outside View and Dimensions

Base Station ES-600

ES-600 外形寸法図



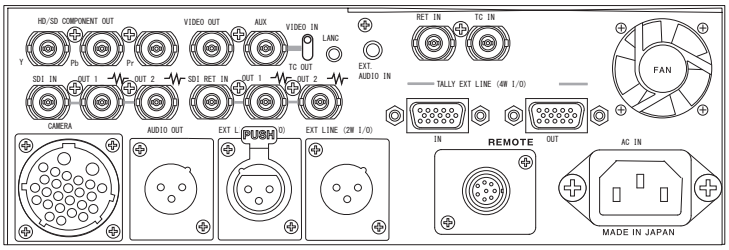

Outside dimension (unit: mm)
外形寸法図(単位:ミリ)